


12 Introduction of Each Series

12.1 Heavy Load Type, MSA Series

A. Construction

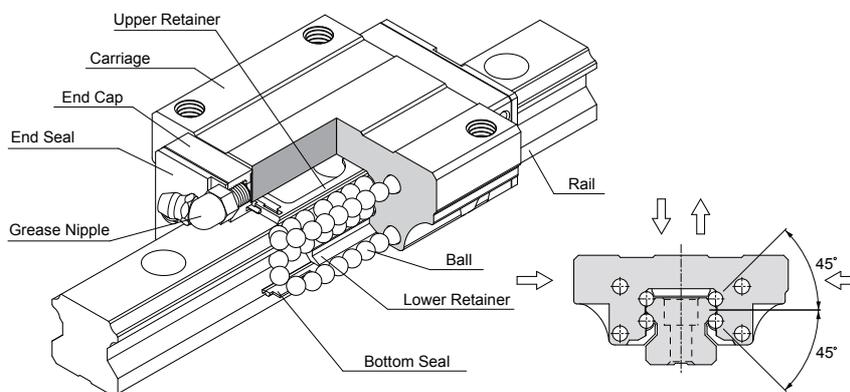

B. Characteristics

The trains of balls are designed to a contact angle of 45° which enables it to bear an equal load in radial, reversed radial and lateral directions. Therefore, it can be applied in any installation direction. Furthermore, MSA series can achieve a well balanced preload for increasing rigidity in four directions while keeping a low frictional resistance. This is especially suit to high precision and high rigidity required motion.

The patent design of lubrication route makes the lubricant evenly distribute in each circulation loop. Therefore, the optimum lubrication can be achieved in any installation direction, and this promotes the performance in running accuracy, service life, and reliability.

High Rigidity, Four-way Equal Load

The four trains of balls are allocated to a circular contact angle at 45° , thus each train of balls can take up an equal rated load in all four directions. Moreover, a sufficient preload can be achieved to increase rigidity, and this makes it suitable for any kind of installation.

Smooth Movement with Low Noise

The simplified design of circulating system with strengthened synthetic resin accessories makes the movement smooth and quiet.

Self Alignment Capability


The self adjustment is performed spontaneously as the design of face-to-face (DF) circular arc groove. Therefore, the installation error could be compensated even under a preload, and which results in precise and smooth linear motion.

Interchangeability


For interchangeable type of linear guideway, the dimensional tolerances are strictly maintained within a reasonable range, and this has made the random matching of the same size of rails and carriages possible. Therefore, the similar preload and accuracy can be obtained even under the random matching condition. As a result of this advantage, the linear guideway can be stocked as standard parts, the installation and maintenance become more convenient. Moreover, this is also beneficial for shortening the delivery time.

C. Carriage Type


Heavy Load

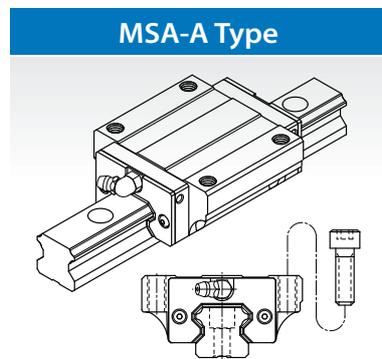

Installed from top side of carriage with the thread length longer than MSA-E type.

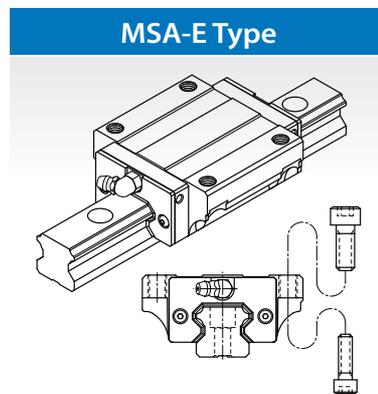


This type offers the installation either from top or bottom side of carriage.

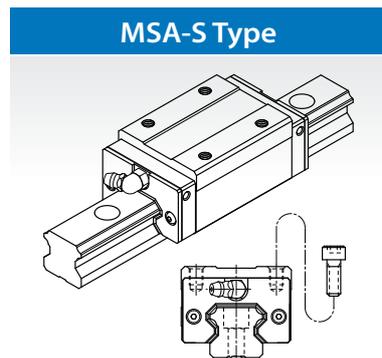

Square type with smaller width and can be installed from top side of carriage.


Ultra Heavy Load

MSA-LA Type

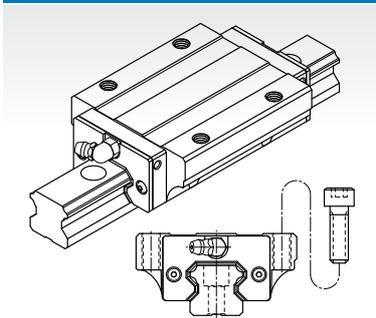


All dimensions are same as MSA-A except the length is longer, which makes it more rigid.

MSA-LE Type

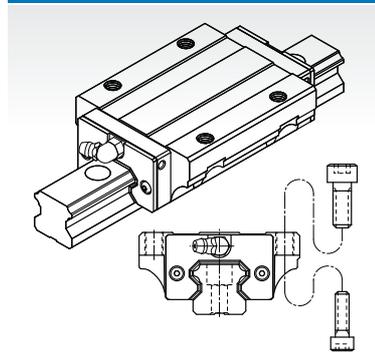

All dimensions are same as MSA-E except the length is longer, which makes it more rigid.


MSA-LS Type

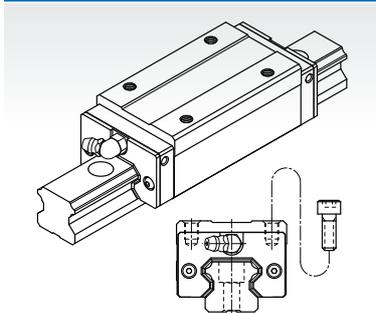


All dimensions are same as MSA-S except the length is longer, which makes it more rigid.

D. Rail Type

Counter bore (R type)

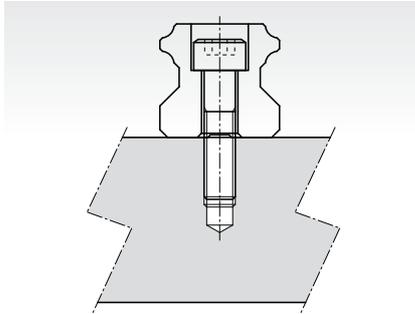

Tapped Hole (T type)

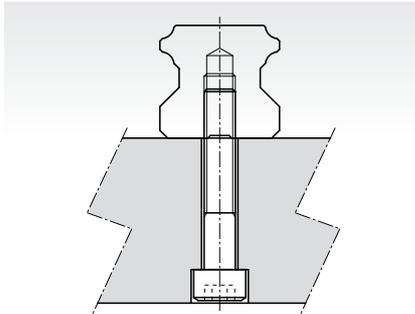



E. Description of Specification

(1) Non-Interchangeable Type

| | MSA | 25 | A | 2 | SS | F0 | |
|---|------------|-----------|----------|----------|-----------|-----------|--|
| Series : MSA | | | | | | | |
| Size : 15, 20, 25, 30, 35, 45, 55, 65 | | | | | | | |
| Carriage type : (1) Heavy load A : Flange type, mounting from top E : Flange type, mounting either from top or bottom S : Square type (2) Ultra heavy load LA : Flange type, mounting from top LE : Flange type, mounting either from top or bottom LS : Square type | | | | | | | |
| Number of carriages per rail : 1, 2, 3 ... | | | | | | | |
| Dust protection option of carriage : No symbol, UU, SS, ZZ, DD, KK, LL, RR (refer to chapter 15.1 Dust Proof) | | | | | | | |
| Preload : FC (Light preload), F0 (Medium preload), F1 (Heavy preload) | | | | | | | |
| Code of special carriage : No symbol, A, B, C, D ... | | | | | | | |
| Rail type : R (Counter-bore type), T (Tapped hole type) | | | | | | | |
| Rail length (mm) | | | | | | | |
| Rail hole pitch from start side (E1 , see Fig.12.1) | | | | | | | |
| Rail hole pitch to the end side (E2 , see Fig.12.1) | | | | | | | |
| Accuracy grade : N, H, P, SP, UP | | | | | | | |
| Code of special rail : No symbol, A, B ... | | | | | | | |
| Dust protection option of rail : No symbol, /CC, /MC, /MD (refer to chapter 15.1 Code of contamination fro Rail) | | | | | | | |
| Number of rails per axis : No symbol, II, III, IV ... | | | | | | | |


+R 1200 - 20 / 40 P II

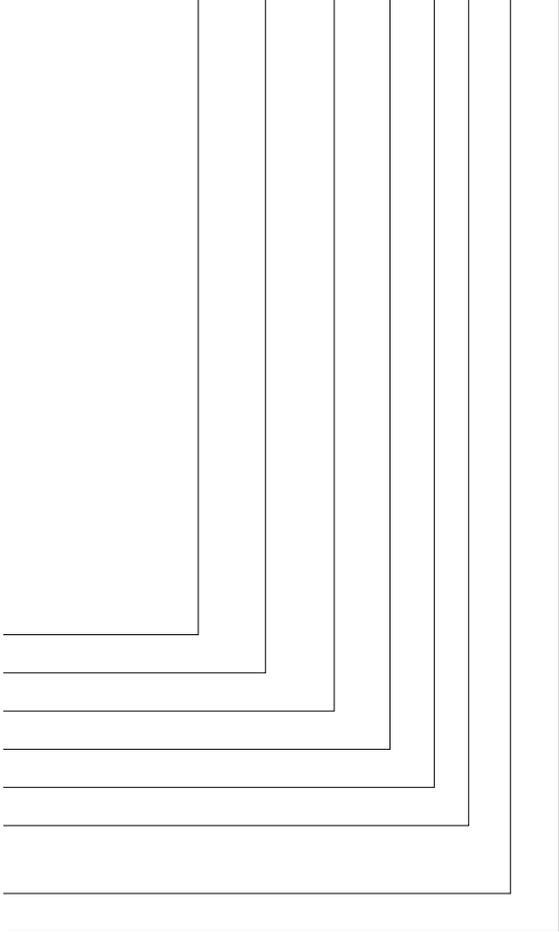

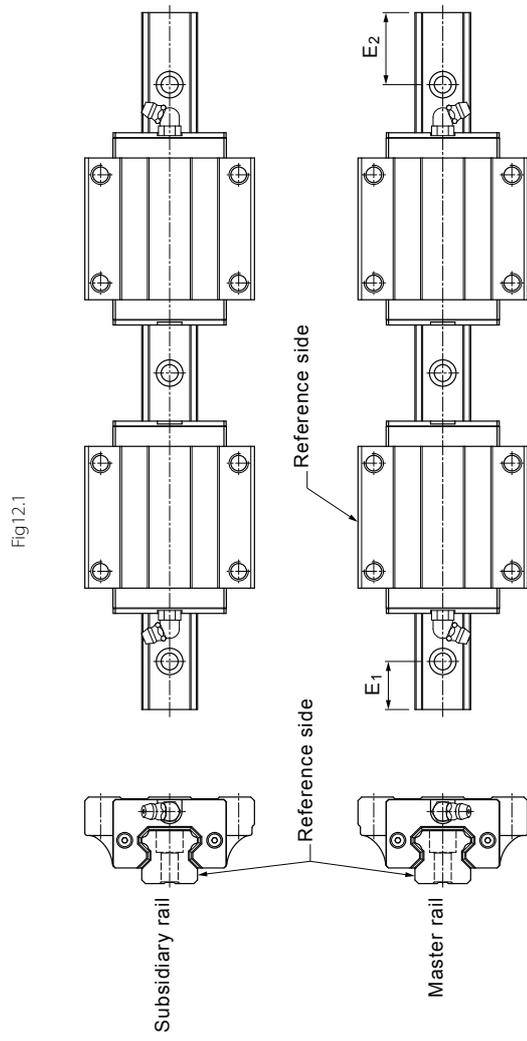


(2) Interchangeable Type

Code of Carriage

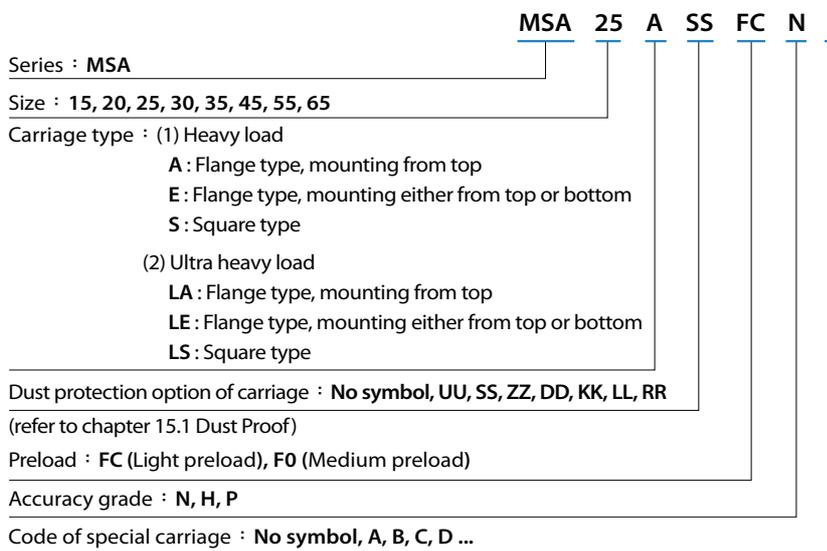

Code of Rail

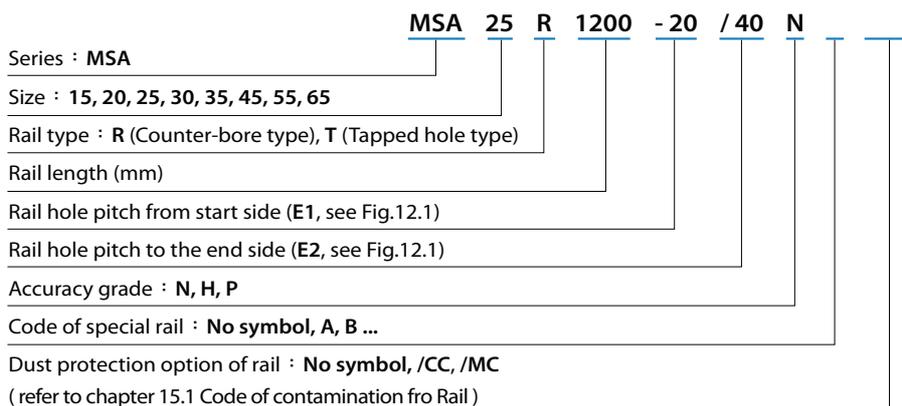

F. Accuracy Grade

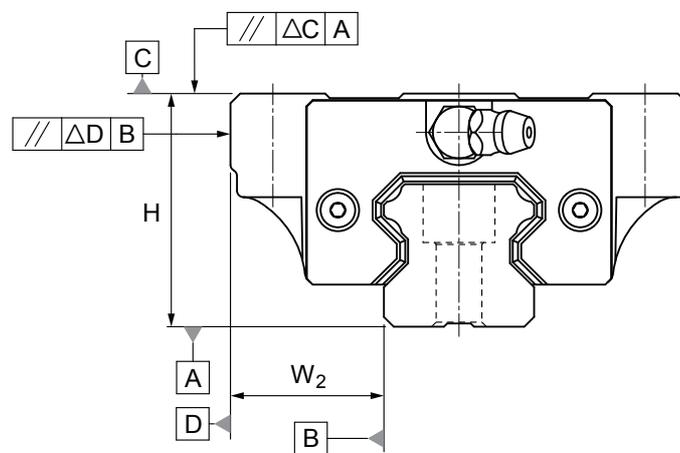


Table 1 Running Parallelism

| Rail length (mm) | | Running Parallelism Values(μm) | | | | |
|------------------|---------|---------------------------------------|----|----|-----|-----|
| Above | Or less | N | H | P | SP | UP |
| 0 | 315 | 9 | 6 | 3 | 2 | 1.5 |
| 315 | 400 | 11 | 8 | 4 | 2 | 1.5 |
| 400 | 500 | 13 | 9 | 5 | 2 | 1.5 |
| 500 | 630 | 16 | 11 | 6 | 2.5 | 1.5 |
| 630 | 800 | 18 | 12 | 7 | 3 | 2 |
| 800 | 1000 | 20 | 14 | 8 | 4 | 2 |
| 1000 | 1250 | 22 | 16 | 10 | 5 | 2.5 |
| 1250 | 1600 | 25 | 18 | 11 | 6 | 3 |
| 1600 | 2000 | 28 | 20 | 13 | 7 | 3.5 |
| 2000 | 2500 | 30 | 22 | 15 | 8 | 4 |
| 2500 | 3000 | 32 | 24 | 16 | 9 | 4.5 |
| 3000 | 3500 | 33 | 25 | 17 | 11 | 5 |
| 3500 | 4000 | 34 | 26 | 18 | 12 | 6 |

A Non-Interchangeable Type

| Model No. | Item | Accuracy Grade | | | | |
|----------------|--|----------------------|--------|-------------|--------------------|--------------------|
| | | Normal N | High H | Precision P | Super Precision SP | Ultra Precision UP |
| 15 20 | Tolerance for height H | ±0.1 | ±0.03 | 0 -0.03 | 0 -0.015 | 0 -0.008 |
| | Height difference ΔH | 0.02 | 0.01 | 0.006 | 0.004 | 0.003 |
| | Tolerance for distance W ₂ | ±0.1 | ±0.03 | 0 -0.03 | 0 -0.015 | 0 -0.008 |
| | Difference in distance W ₂ (ΔW ₂) | 0.02 | 0.01 | 0.006 | 0.004 | 0.003 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | | | |
| 25 30 35 | Tolerance for height H | ±0.1 | ±0.04 | 0 -0.04 | 0 -0.02 | 0 -0.01 |
| | Height difference ΔH | 0.02 | 0.015 | 0.007 | 0.005 | 0.003 |
| | Tolerance for distance W ₂ | ±0.1 | ±0.04 | 0 -0.04 | 0 -0.02 | 0 -0.01 |
| | Difference in distance W ₂ (ΔW ₂) | 0.03 | 0.015 | 0.007 | 0.005 | 0.003 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | | | |
| 45 55 | Tolerance for height H | ±0.1 | ±0.05 | 0 -0.05 | 0 -0.03 | 0 -0.02 |
| | Height difference ΔH | 0.03 | 0.015 | 0.007 | 0.005 | 0.003 |
| | Tolerance for distance W ₂ | ±0.1 | ±0.05 | 0 -0.05 | 0 -0.03 | 0 -0.02 |
| | Difference in distance W ₂ (ΔW ₂) | 0.03 | 0.02 | 0.01 | 0.007 | 0.005 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | | | |
| 65 | Tolerance for height H | ±0.1 | ±0.07 | 0 -0.07 | 0 -0.05 | 0 -0.03 |
| | Height difference ΔH | 0.03 | 0.02 | 0.01 | 0.007 | 0.005 |
| | Tolerance for distance W ₂ | ±0.1 | ±0.07 | 0 -0.07 | 0 -0.05 | 0 -0.03 |
| | Difference in distance W ₂ (ΔW ₂) | 0.03 | 0.025 | 0.015 | 0.01 | 0.007 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | | | |

B Interchangeable Type

| Model No. | Item | Accuracy Grade | | |
|----------------|---|------------------------------|--------|-------------|
| | | Normal N | High H | Precision P |
| 15 20 | Tolerance for height H | ±0.1 | ±0.03 | 0 -0.03 |
| | Height difference ΔH | 0.02 | 0.01 | 0.006 |
| | Tolerance for distance W_2 | ±0.1 | ±0.03 | 0 -0.03 |
| | Difference in distance $W_2(\Delta W_2)$ | 0.02 | 0.01 | 0.006 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | |
| 25 30 35 | Tolerance for height H | ±0.1 | ±0.04 | 0 -0.04 |
| | Height difference ΔH | 0.02 | 0.015 | 0.007 |
| | Tolerance for distance W_2 | ±0.1 | ±0.04 | 0 -0.04 |
| | Difference in distance $W_2(\Delta W_2)$ | 0.03 | 0.015 | 0.007 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | |
| 45 55 | Tolerance for height H | ±0.1 | ±0.05 | 0 -0.05 |
| | Height difference ΔH | 0.03 | 0.015 | 0.007 |
| | Tolerance for distance W_2 | ±0.1 | ±0.05 | 0 -0.05 |
| | Difference in distance $W_2(\Delta W_2)$ | 0.03 | 0.02 | 0.01 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | |
| 65 | Tolerance for height H | ±0.1 | ±0.07 | 0 -0.07 |
| | Height difference ΔH | 0.03 | 0.02 | 0.01 |
| | Tolerance for distance W_2 | ±0.1 | ±0.07 | 0 -0.07 |
| | Difference in distance $W_2(\Delta W_2)$ | 0.03 | 0.025 | 0.015 |
| | Running parallelism of surface C with surface A | ΔC (see the table 1) | | |
| | Running parallelism of surface D with surface B | ΔD (see the table 1) | | |

G. Preload Grade


| Series | Preload grade | | |
|--------|--------------------|---------------------|--------------------|
| | Light preload (FC) | Medium preload (F0) | Heavy preload (F1) |
| MSA15 | 0~0.02C | 0.03~0.05C | - |
| MSA20 | | | |
| MSA25 | | | |
| MSA30 | | | |
| MSA35 | | | |
| MSA45 | | | |
| MSA55 | | | |
| MSA65 | 0~0.02C | 0.03~0.05C | 0.05~0.08C |
| MSA20L | | | |
| MSA25L | | | |
| MSA30L | | | |
| MSA35L | | | |
| MSA45L | | | |
| MSA55L | | | |
| MSA65L | | | |

Note: C is basic dynamic load rating in above table. Refer to the specification of products, please.

H. The Shoulder Height and Corner Radius for Installation

MSA series

Unit: mm

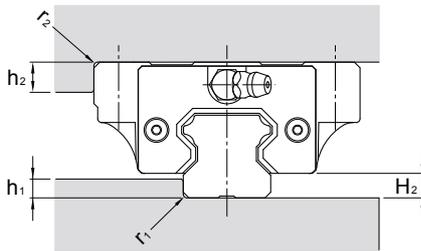


| Model No. | r_1 (max.) | r_2 (max.) | h_1 | h_2 | H_2 |
|-----------|--------------|--------------|-------|-------|-------|
| 15 | 0.5 | 0.5 | 3 | 4 | 4.2 |
| 20 | 0.5 | 0.5 | 3.5 | 5 | 5 |
| 25 | 1 | 1 | 5 | 5 | 6.5 |
| 30 | 1 | 1 | 5 | 5 | 8 |
| 35 | 1 | 1 | 6 | 6 | 9.5 |
| 45 | 1 | 1 | 8 | 8 | 10 |
| 55 | 1.5 | 1.5 | 10 | 10 | 13 |
| 65 | 1.5 | 1.5 | 10 | 10 | 15 |

I. Dimensional Tolerance of Mounting Surface

MSA Series

With the self alignment capability, the minor dimensional error in mounting surface could be compensated and achieves smooth linear motion. The tolerances of parallelism between two axes are shown as below.


The parallel deviation between two axes (e_1)

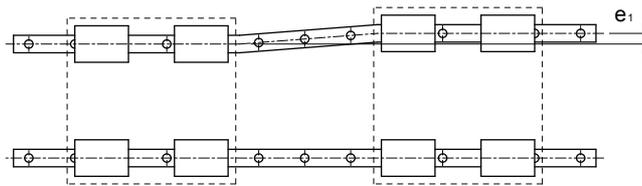

Unit: μm

| Model No. | Preload Grade | | |
|-----------|---------------|----|----|
| | FC | F0 | F1 |
| 15 | 25 | 18 | - |
| 20 | 25 | 20 | 18 |
| 25 | 30 | 22 | 20 |
| 30 | 40 | 30 | 27 |
| 35 | 50 | 35 | 30 |
| 45 | 60 | 40 | 35 |
| 55 | 70 | 50 | 45 |
| 65 | 80 | 60 | 55 |

Level difference between two axes (e_2)

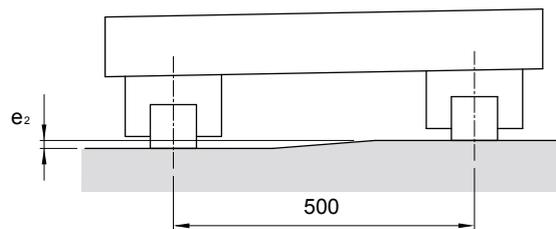


Unit: μm

| Model No. | Preload Grade | | |
|-----------|---------------|-----|-----|
| | FC | F0 | F1 |
| 15 | 130 | 85 | - |
| 20 | 130 | 85 | 50 |
| 25 | 130 | 85 | 70 |
| 30 | 170 | 110 | 90 |
| 35 | 210 | 150 | 120 |
| 45 | 250 | 170 | 140 |
| 55 | 300 | 210 | 170 |
| 65 | 350 | 250 | 200 |

Note: The permissible values in table are applicable when the span is 500mm wide.

J. Rail Maximum Length and Standrad

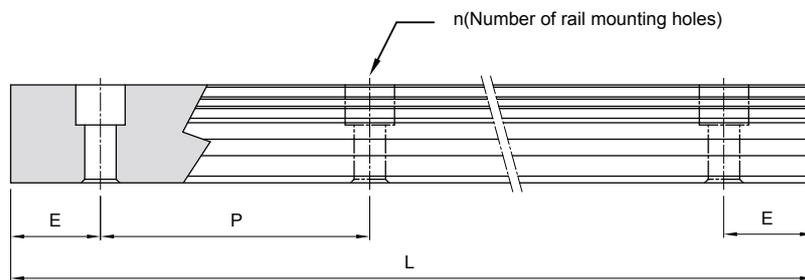

$$L=(n-1)\times P+2\times E$$

L: Total Length of rail (*mm*)

n: Nuber of mounting holes


P: Distance between any two holes (*mm*)

E: Distance from the center of the last hole to the edge (*mm*)

Unit: mm


| Model No. | Standard Pitch (P) | Standard (E _{std.}) | Minimum (E _{min.}) | Max (L ₀ max.) |
|-----------|--------------------|-------------------------------|------------------------------|---------------------------|
| MSA 15 | 60 | 20 | 5 | 4000 |
| MSA 20 | 60 | 20 | 6 | 4000 |
| MSA 25 | 60 | 20 | 7 | 4000 |
| MSA 30 | 80 | 20 | 8 | 4000 |
| MSA 35 | 80 | 20 | 8 | 4000 |
| MSA 45 | 105 | 22.5 | 11 | 4000 |
| MSA 55 | 120 | 30 | 13 | 4000 |
| MSA 65 | 150 | 35 | 14 | 4000 |

K. Tapped-hole Rail Dimensions

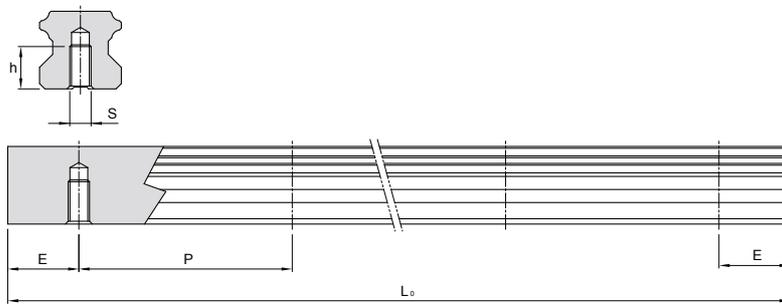

| Rail Model | S | h(mm) |
|------------|-----|-------|
| MSA 15 T | M5 | 8 |
| MSA 20 T | M6 | 10 |
| MSA 25 T | M6 | 12 |
| MSA 30 T | M8 | 15 |
| MSA 35 T | M8 | 17 |
| MSA 45 T | M12 | 24 |
| MSA 55 T | M14 | 24 |
| MSA 65 T | M20 | 30 |

Dimensions of MSA-A / MSA-LA

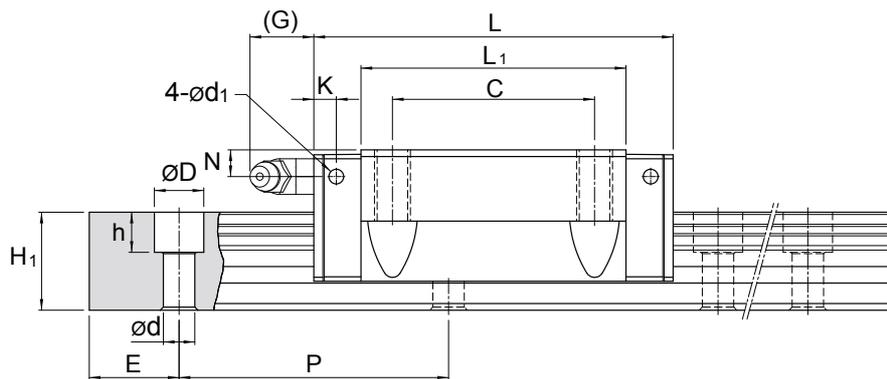


Unit: mm

| Model No. | External dimension | | | | | Carriage dimension | | | | | | | | | | |
|-----------------------|--------------------|------------|----------------|----------------|----------------|--------------------|----|--------|----------------|----|----------------|-----|------|------|----------------|------------------|
| | Height H | Width W | Length L | W ₂ | H ₂ | B | C | S × l | L ₁ | T | T ₁ | N | G | K | d ₁ | Grease Nipple |
| MSA 15 A | 24 | 47 | 56.3 | 16 | 4.2 | 38 | 30 | M5×11 | 39.3 | 7 | 11 | 4.3 | 7 | 3.2 | 3.3 | G-M4 |
| MSA 20 A MSA 20 LA | 30 | 63 | 72.9 88.8 | 21.5 | 5 | 53 | 40 | M6×10 | 51.3 67.2 | 7 | 10 | 5 | 12 | 5.8 | 3.3 | G-M6 |
| MSA 25 A MSA 25 LA | 36 | 70 | 81.6 100.6 | 23.5 | 6.5 | 57 | 45 | M8×16 | 59 78 | 11 | 16 | 6 | 12 | 5.8 | 3.3 | G-M6 |
| MSA 30 A MSA 30 LA | 42 | 90 | 97 119.2 | 31 | 8 | 72 | 52 | M10×18 | 71.4 93.6 | 11 | 18 | 7 | 12 | 6.5 | 3.3 | G-M6 |
| MSA 35 A MSA 35 LA | 48 | 100 | 111.2 136.6 | 33 | 9.5 | 82 | 62 | M10×21 | 81 106.4 | 13 | 21 | 8 | 11.5 | 8.6 | 3.3 | G-M6 |
| MSA 45 A MSA 45 LA | 60 | 120 | 137.7 169.5 | 37.5 | 10 | 100 | 80 | M12×25 | 102.5 134.3 | 13 | 25 | 10 | 13.5 | 10.6 | 3.3 | G-PT1/8 |

Note: Request for size 55 and 65 MSA-A / MSA-LA carriage, please refer to MSA-E / MSA-LE carriage type.

Note: The basic dynamic load rating C of ball type is based on the 50 km for nominal life. The conversion between C for 50 km and C₁₀₀ for 100 km is C=1.26 × C₁₀₀.


Note*: Single: Single carriage/ Double: Double carriages closely contacting with each other.

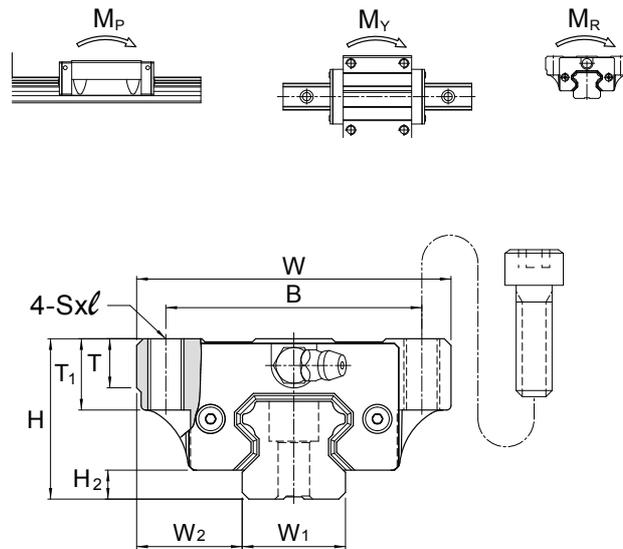

Unit: mm

| Model No. | Rail dimension | | | | | Basic load rating | | Static moment rating | | | | | Weight | |
|-----------|-------------------------|--------------------------|------------|-----------|-------------|--------------------|--------------------------------|------------------------|---------|------------------------|---------|------------------------|----------------|--------------|
| | Width W ₁ | Height H ₁ | Pitch P | E std. | D × h × d | Dynamic C kN | Static C ₀ kN | M _P kN-m | | M _Y kN-m | | M _R kN-m | Carriage kg | Rail kg/m |
| | | | | | | | | Single* | Double* | Single* | Double* | | | |
| MSA 15 A | 15 | 15 | 60 | 20 | 7.5×5.3×4.5 | 11.8 | 18.9 | 0.12 | 0.68 | 0.12 | 0.68 | 0.14 | 0.18 | 1.5 |
| MSA 20 A | 20 | 18 | 60 | 20 | 9.5×8.5×6 | 19.2 | 29.5 | 0.23 | 1.42 | 0.23 | 1.42 | 0.29 | 0.4 | 2.4 |
| MSA 20 LA | | | | | | 23.3 | 39.3 | 0.39 | 2.23 | 0.39 | 2.23 | 0.38 | 0.52 | |
| MSA 25 A | 23 | 22 | 60 | 20 | 11×9×7 | 28.1 | 42.4 | 0.39 | 2.20 | 0.39 | 2.20 | 0.48 | 0.62 | 3.4 |
| MSA 25 LA | | | | | | 34.4 | 56.6 | 0.67 | 3.52 | 0.67 | 3.52 | 0.63 | 0.82 | |
| MSA 30 A | 28 | 26 | 80 | 20 | 14×12×9 | 39.2 | 57.8 | 0.62 | 3.67 | 0.62 | 3.67 | 0.79 | 1.09 | 4.8 |
| MSA 30 LA | | | | | | 47.9 | 77.0 | 1.07 | 5.81 | 1.07 | 5.81 | 1.05 | 1.43 | |
| MSA 35 A | 34 | 29 | 80 | 20 | 14×12×9 | 52.0 | 75.5 | 0.93 | 5.47 | 0.93 | 5.47 | 1.25 | 1.61 | 6.6 |
| MSA 35 LA | | | | | | 63.6 | 100.6 | 1.60 | 8.67 | 1.60 | 8.67 | 1.67 | 2.11 | |
| MSA 45 A | 45 | 38 | 105 | 22.5 | 20×17×14 | 83.8 | 117.9 | 1.81 | 10.67 | 1.81 | 10.67 | 2.57 | 2.98 | 11.5 |
| MSA 45 LA | | | | | | 102.4 | 157.3 | 3.13 | 16.95 | 3.13 | 16.95 | 3.43 | 3.9 | |

Dimensions of MSA-E / MSA-LE


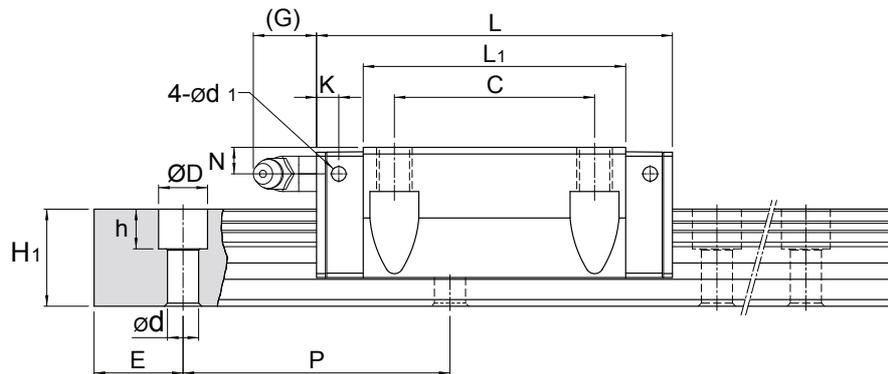


Unit: mm

| Model No. | External dimension | | | | | Carriage dimension | | | | | | | | | | | | |
|-----------------------|--------------------|------------|----------------|----------------|----------------|--------------------|-----|--------|----------------|------|----------------|----------------|-----|------|------|----------------|------------------|--|
| | Height H | Width W | Length L | W ₂ | H ₂ | B | C | S × l | L ₁ | T | T ₁ | T ₂ | N | G | K | d ₁ | Grease Nipple | |
| MSA 15 E | 24 | 47 | 56.3 | 16 | 4.2 | 38 | 30 | M5×7 | 39.3 | 7 | 11 | 7 | 4.3 | 7 | 3.2 | 3.3 | G-M4 | |
| MSA 20 E MSA 20 LE | 30 | 63 | 72.9 88.8 | 21.5 | 5 | 53 | 40 | M6×10 | 51.3 67.2 | 7 | 10 | 10 | 5 | 12 | 5.8 | 3.3 | G-M6 | |
| MSA 25 E MSA 25 LE | 36 | 70 | 81.6 100.6 | 23.5 | 6.5 | 57 | 45 | M8×10 | 59 78 | 11 | 16 | 10 | 6 | 12 | 5.8 | 3.3 | G-M6 | |
| MSA 30 E MSA 30 LE | 42 | 90 | 97 119.2 | 31 | 8 | 72 | 52 | M10×10 | 71.4 93.6 | 11 | 18 | 10 | 7 | 12 | 6.5 | 3.3 | G-M6 | |
| MSA 35 E MSA 35 LE | 48 | 100 | 111.2 136.6 | 33 | 9.5 | 82 | 62 | M10×13 | 81 106.4 | 13 | 21 | 13 | 8 | 11.5 | 8.6 | 3.3 | G-M6 | |
| MSA 45 E MSA 45 LE | 60 | 120 | 137.7 169.5 | 37.5 | 10 | 100 | 80 | M12×15 | 102.5 134.3 | 13 | 25 | 15 | 10 | 13.5 | 10.6 | 3.3 | G-PT 1/8 | |
| MSA 55 E MSA 55 LE | 70 | 140 | 161.5 199.5 | 43.5 | 13 | 116 | 95 | M14×17 | 119.5 157.5 | 19 | 32 | 17 | 11 | 13.5 | 8.6 | 3.3 | G-PT 1/8 | |
| MSA 65 E MSA 65 LE | 90 | 170 | 199 253 | 53.5 | 15 | 142 | 110 | M16×23 | 149 203 | 21.5 | 37 | 23 | 19 | 13.5 | 8.6 | 3.3 | G-PT 1/8 | |

Note: The basic dynamic load rating C of ball type is based on the 50 km for nominal life. The conversion between C for 50 km and C₁₀₀ for 100 km is C=1.26 × C₁₀₀.

Note*: Single: Single carriage/ Double: Double carriages closely contacting with each other.

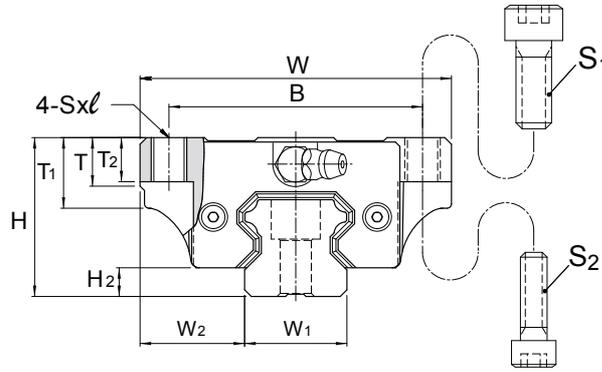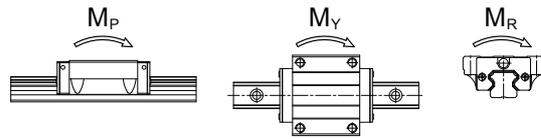


| Model No. | Bolt Size | |
|-----------|----------------|----------------|
| | S ₁ | S ₂ |
| MSA 15 | M5 | M4 |
| MSA 20 | M6 | M5 |
| MSA 25 | M8 | M6 |
| MSA 30 | M10 | M8 |
| MSA 35 | M10 | M8 |
| MSA 45 | M12 | M10 |
| MSA 55 | M14 | M12 |
| MSA 65 | M16 | M14 |

Unit: mm

| Model No. | Rail dimension | | | | | Basic load rating | | Static moment rating | | | | | | Weight | |
|-----------|-------------------------|--------------------------|------------|-----------|-------------|--------------------|--------------------------------|------------------------|---------|------------------------|---------|------------------------|----------------|--------------|--|
| | Width W ₁ | Height H ₁ | Pitch P | E std. | D × h × d | Dynamic C kN | Static C ₀ kN | M _p kN-m | | M _y kN-m | | M _r kN-m | Carriage kg | Rail kg/m | |
| | | | | | | | | Single* | Double* | Single* | Double* | | | | |
| MSA 15 E | 15 | 15 | 60 | 20 | 7.5×5.3×4.5 | 11.8 | 18.9 | 0.12 | 0.68 | 0.12 | 0.68 | 0.14 | 0.18 | 1.5 | |
| MSA 20 E | 20 | 18 | 60 | 20 | 9.5×8.5×6 | 19.2 | 29.5 | 0.23 | 1.42 | 0.23 | 1.42 | 0.29 | 0.4 | 2.4 | |
| MSA 20 LE | | | | | | 23.3 | 39.3 | 0.39 | 2.23 | 0.39 | 2.23 | 0.38 | 0.52 | | |
| MSA 25 E | 23 | 22 | 60 | 20 | 11×9×7 | 28.1 | 42.4 | 0.39 | 2.20 | 0.39 | 2.20 | 0.48 | 0.62 | 3.4 | |
| MSA 25 LE | | | | | | 34.4 | 56.6 | 0.67 | 3.52 | 0.67 | 3.52 | 0.63 | 0.82 | | |
| MSA 30 E | 28 | 26 | 80 | 20 | 14×12×9 | 39.2 | 57.8 | 0.62 | 3.67 | 0.62 | 3.67 | 0.79 | 1.09 | 4.8 | |
| MSA 30 LE | | | | | | 47.9 | 77.0 | 1.07 | 5.81 | 1.07 | 5.81 | 1.05 | 1.43 | | |
| MSA 35 E | 34 | 29 | 80 | 20 | 14×12×9 | 52.0 | 75.5 | 0.93 | 5.47 | 0.93 | 5.47 | 1.25 | 1.61 | 6.6 | |
| MSA 35 LE | | | | | | 63.6 | 100.6 | 1.60 | 8.67 | 1.60 | 8.67 | 1.67 | 2.11 | | |
| MSA 45 E | 45 | 38 | 105 | 22.5 | 20×17×14 | 83.8 | 117.9 | 1.81 | 10.67 | 1.81 | 10.67 | 2.57 | 2.98 | 11.5 | |
| MSA 45 LE | | | | | | 102.4 | 157.3 | 3.13 | 16.95 | 3.13 | 16.95 | 3.43 | 3.9 | | |
| MSA 55 E | 53 | 44 | 120 | 30 | 23×20×16 | 123.6 | 169.8 | 3.13 | 17.57 | 3.13 | 17.57 | 4.50 | 4.17 | 15.5 | |
| MSA 55 LE | | | | | | 151.1 | 226.4 | 5.40 | 28.11 | 5.40 | 28.11 | 6.00 | 5.49 | | |
| MSA 65 E | 63 | 53 | 150 | 35 | 26×22×18 | 198.8 | 265.3 | 6.11 | 33.71 | 6.11 | 33.71 | 8.36 | 8.73 | 21.9 | |
| MSA 65 LE | | | | | | 253.5 | 375.9 | 11.84 | 57.32 | 11.84 | 57.32 | 11.84 | 11.89 | | |

Dimensions of MSA-S / MSA-LS


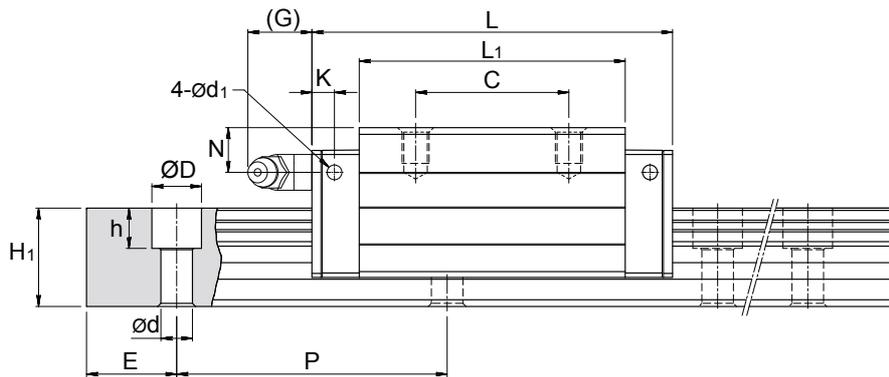


Unit: mm

| Model No. | External dimension | | | | | Carriage dimension | | | | | | | | | | | Grease Nipple |
|-----------|--------------------|---------|----------|----------------|----------------|--------------------|----|--------|----------------|------|-----|------|------|----------------|----------|--|---------------|
| | Height H | Width W | Length L | W ₂ | H ₂ | B | C | S × l | L ₁ | T | N | G | K | d ₁ | | | |
| MSA 15 S | 28 | 34 | 56.3 | 9.5 | 4.2 | 26 | 26 | M4×5 | 39.3 | 7.2 | 8.3 | 7 | 3.2 | 3.3 | G-M4 | | |
| MSA 20 S | 30 | 44 | 72.9 | 12 | 5 | 32 | 36 | M5×6 | 51.3 | 8 | 5 | 12 | 5.8 | 3.3 | G-M6 | | |
| MSA 20 LS | | | 88.8 | | | | | | 67.2 | | | | | | | | |
| MSA 25 S | 40 | 48 | 81.6 | 12.5 | 6.5 | 35 | 35 | M6×8 | 59 | 10 | 10 | 12 | 5.8 | 3.3 | G-M6 | | |
| MSA 25 LS | | | 100.6 | | | | | | 78 | | | | | | | | |
| MSA 30 S | 45 | 60 | 97 | 16 | 8 | 40 | 40 | M8×10 | 71.4 | 11.7 | 10 | 12 | 6.5 | 3.3 | G-M6 | | |
| MSA 30 LS | | | 119.2 | | | | | | 93.6 | | | | | | | | |
| MSA 35 S | 55 | 70 | 111.2 | 18 | 9.5 | 50 | 50 | M8×12 | 81 | 12.7 | 15 | 11.5 | 8.6 | 3.3 | G-M6 | | |
| MSA 35 LS | | | 136.6 | | | | | | 106.4 | | | | | | | | |
| MSA 45 S | 70 | 86 | 137.7 | 20.5 | 10 | 60 | 60 | M10×17 | 102.5 | 16 | 20 | 13.5 | 10.6 | 3.3 | G-PT 1/8 | | |
| MSA 45 LS | | | 169.5 | | | | | | 134.3 | | | | | | | | |
| MSA 55 S | 80 | 100 | 161.5 | 23.5 | 13 | 75 | 75 | M12×18 | 119.5 | 18 | 21 | 13.5 | 8.6 | 3.3 | G-PT 1/8 | | |
| MSA 55 LS | | | 199.5 | | | | | | 157.5 | | | | | | | | |
| MSA 65 S | 90 | 126 | 199 | 31.5 | 15 | 76 | 70 | M16×20 | 149 | 23 | 19 | 13.5 | 8.6 | 3.3 | G-PT 1/8 | | |
| MSA 65 LS | | | 253 | | | | | | 203 | | | | | | | | |

Note: The basic dynamic load rating C of ball type is based on the 50 km for nominal life. The conversion between C for 50 km and C₁₀₀ for 100 km is C=1.26 × C₁₀₀.

Note*: Single: Single carriage/ Double: Double carriages closely contacting with each other.

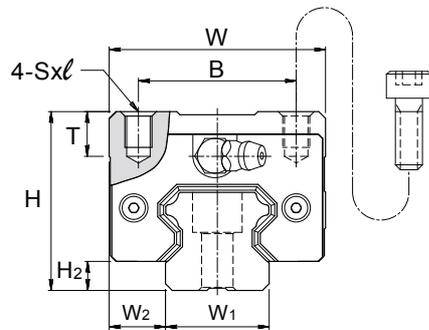

Unit: mm

| Model No. | Rail dimension | | | | | Basic load rating | | Static moment rating | | | | | Weight | |
|-----------|-------------------------|--------------------------|------------|-----------|-------------|--------------------|--------------------------------|------------------------|---------|------------------------|---------|------------------------|----------------|--------------|
| | Width W ₁ | Height H ₁ | Pitch P | E std. | D × h × d | Dynamic C kN | Static C ₀ kN | M _P kN-m | | M _Y kN-m | | M _R kN-m | Carriage kg | Rail kg/m |
| | | | | | | | | Single* | Double* | Single* | Double* | | | |
| MSA 15 S | 15 | 15 | 60 | 20 | 7.5×5.3×4.5 | 11.8 | 18.9 | 0.12 | 0.68 | 0.12 | 0.68 | 0.14 | 0.18 | 1.5 |
| MSA 20 S | 20 | 18 | 60 | 20 | 9.5×8.5×6 | 19.2 | 29.5 | 0.23 | 1.42 | 0.23 | 1.42 | 0.29 | 0.3 | 2.4 |
| MSA 20 LS | | | | | | 23.3 | 39.3 | 0.39 | 2.23 | 0.39 | 2.23 | 0.38 | 0.39 | |
| MSA 25 S | 23 | 22 | 60 | 20 | 11×9×7 | 28.1 | 42.4 | 0.39 | 2.20 | 0.39 | 2.20 | 0.48 | 0.52 | 3.4 |
| MSA 25 LS | | | | | | 34.4 | 56.6 | 0.67 | 3.52 | 0.67 | 3.52 | 0.63 | 0.68 | |
| MSA 30 S | 28 | 26 | 80 | 20 | 14×12×9 | 39.2 | 57.8 | 0.62 | 3.67 | 0.62 | 3.67 | 0.79 | 0.86 | 4.8 |
| MSA 30 LS | | | | | | 47.9 | 77.0 | 1.07 | 5.81 | 1.07 | 5.81 | 1.05 | 1.12 | |
| MSA 35 S | 34 | 29 | 80 | 20 | 14×12×9 | 52.0 | 75.5 | 0.93 | 5.47 | 0.93 | 5.47 | 1.25 | 1.45 | 6.6 |
| MSA 35 LS | | | | | | 63.6 | 100.6 | 1.60 | 8.67 | 1.60 | 8.67 | 1.67 | 1.9 | |
| MSA 45 S | 45 | 38 | 105 | 22.5 | 20×17×14 | 83.8 | 117.9 | 1.81 | 10.67 | 1.81 | 10.67 | 2.57 | 2.83 | 11.5 |
| MSA 45 LS | | | | | | 102.4 | 157.3 | 3.13 | 16.95 | 3.13 | 16.95 | 3.43 | 3.7 | |
| MSA 55 S | 53 | 44 | 120 | 30 | 23×20×16 | 123.6 | 169.8 | 3.13 | 17.57 | 3.13 | 17.57 | 4.50 | 4.12 | 15.5 |
| MSA 55 LS | | | | | | 151.1 | 226.4 | 5.40 | 28.11 | 5.40 | 28.11 | 6.00 | 4.91 | |
| MSA 65 S | 63 | 53 | 150 | 35 | 26×22×18 | 198.8 | 265.3 | 6.11 | 33.71 | 6.11 | 33.71 | 8.36 | 6.43 | 21.9 |
| MSA 65 LS | | | | | | 253.5 | 375.9 | 11.84 | 57.32 | 11.84 | 57.32 | 11.84 | 8.76 | |